



# STYLES/DIMENSIONS

## CUSTOMISATION AND FLEXIBILITY


Our range of filter housings is offered with a comprehensive choice of inlet and outlet orientations.

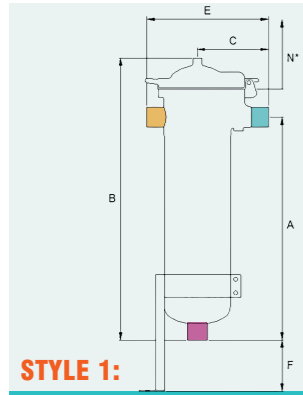


**STYLE 1:**  
Inline. Side inlet -  
Side outlet - bottom drain.

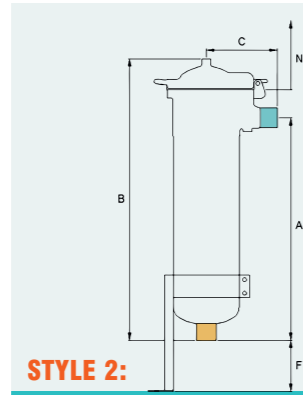

**STYLE 2:**  
Side inlet -  
bottom outlet.

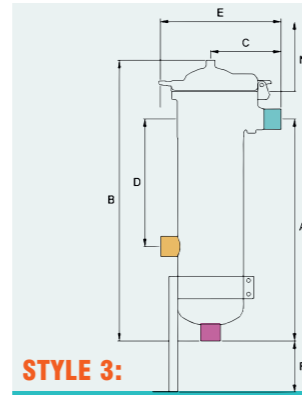

**STYLE 3:**  
Side inlet - opposite side  
outlet - bottom drain.

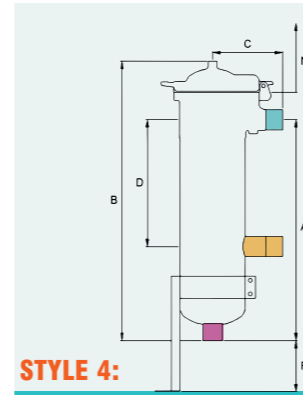


**STYLE 4:**  
Side inlet - same side  
outlet - bottom drain.

| MODEL  | CONNECTION TYPE | STYLE | A   | B    | C   | D   | E   | F      | N*  |
|--------|-----------------|-------|-----|------|-----|-----|-----|--------|-----|
| RBFP13 | 1"BSP (F)       | 2     | 299 | 392  | 94  |     |     |        | 180 |
| RBFP13 | 1"Flanged       | 2     | 301 | 394  | 123 |     |     |        | 180 |
| RBFP14 | 1"BSP (F)       | 2     | 439 | 532  | 94  |     |     |        | 320 |
| RBFP14 | 1"Flanged       | 2     | 441 | 534  | 123 |     |     |        | 320 |
| RBFP11 | 2"BSP (F)       | 2     | 506 | 623  | 143 |     |     | 80-280 | 340 |
| RBFP11 | 2"BSP (F)       | 3     | 606 | 723  | 143 | 425 | 286 | 0-190  | 340 |
| RBFP11 | 2"BSP (F)       | 4,7,8 | 606 | 723  | 143 | 425 |     | 0-190  | 340 |
| RBFP11 | 2"BSP (F)       | 5     | 527 | 644  | 143 |     | 286 | 60-260 | 340 |
| RBFP11 | 2"BSP (F)       | 6     | 527 | 644  | 143 |     |     | 60-260 | 340 |
| RBFP11 | 2"Flanged       | 2     | 516 | 633  | 176 |     |     | 70-270 | 340 |
| RBFP11 | 2"Flanged       | 3     | 606 | 723  | 176 | 425 | 352 | 0-190  | 340 |
| RBFP11 | 2"Flanged       | 4,7,8 | 606 | 723  | 176 | 425 |     | 0-190  | 340 |
| RBFP11 | 2"Flanged       | 5     | 527 | 644  | 176 |     | 352 | 90-260 | 340 |
| RBFP11 | 2"Flanged       | 6     | 527 | 644  | 176 |     |     | 90-260 | 340 |
| RBFP12 | 2"BSP (F)       | 2     | 876 | 993  | 143 |     |     | 0-280  | 710 |
| RBFP12 | 2"BSP (F)       | 3     | 976 | 1093 | 143 | 795 | 286 | 0-190  | 710 |
| RBFP12 | 2"BSP (F)       | 4,7,8 | 976 | 1093 | 143 | 795 |     | 0-190  | 710 |
| RBFP12 | 2"BSP (F)       | 5     | 897 | 1014 | 143 |     | 286 | 60-260 | 710 |
| RBFP12 | 2"BSP (F)       | 6     | 897 | 1014 | 143 |     |     | 60-260 | 710 |
| RBFP12 | 2"Flanged       | 2     | 886 | 1003 | 176 |     |     | 0-270  | 710 |
| RBFP12 | 2"Flanged       | 3     | 976 | 1093 | 176 | 795 | 352 | 0-190  | 710 |
| RBFP12 | 2"Flanged       | 4,7,8 | 976 | 1093 | 176 | 795 |     | 0-190  | 710 |
| RBFP12 | 2"Flanged       | 5     | 897 | 1014 | 176 |     | 352 | 90-260 | 710 |
| RBFP12 | 2"Flanged       | 6     | 897 | 1014 | 176 |     |     | 90-260 | 710 |
| RBFP13 | 1"BSP (F)       | 2     | 299 | 383  | 94  |     |     |        | 180 |
| RBFP13 | 1"Flanged       | 2     | 301 | 386  | 123 |     |     |        | 180 |
| RBFP14 | 1"BSP (F)       | 2     | 439 | 523  | 94  |     |     |        | 320 |
| RBFP14 | 1"Flanged       | 2     | 441 | 526  | 123 |     |     |        | 320 |
| RBFD11 | 2"BSP (F)       | 2     | 506 | 718  | 143 |     |     | 80-280 | 340 |
| RBFD11 | 2"BSP (F)       | 3     | 606 | 818  | 143 | 425 | 286 | 0-190  | 340 |
| RBFD11 | 2"BSP (F)       | 4,7,8 | 606 | 818  | 143 | 425 |     | 0-190  | 340 |
| RBFD11 | 2"BSP (F)       | 5     | 527 | 739  | 143 |     | 286 | 60-260 | 340 |
| RBFD11 | 2"BSP (F)       | 6     | 527 | 739  | 143 |     |     | 60-260 | 340 |
| RBFD11 | 2"Flanged       | 2     | 516 | 728  | 176 |     |     | 70-270 | 340 |
| RBFD11 | 2"Flanged       | 3     | 606 | 818  | 176 | 425 | 352 | 0-190  | 340 |
| RBFD11 | 2"Flanged       | 4,7,8 | 606 | 818  | 176 | 425 |     | 0-190  | 340 |
| RBFD11 | 2"Flanged       | 5     | 527 | 739  | 176 |     | 352 | 90-260 | 340 |
| RBFD11 | 2"Flanged       | 6     | 527 | 739  | 176 |     |     | 90-260 | 340 |


Such customisation and flexibility of design is a standard option.

Different orientations of inlet and outlet are referred to as housing "Styles". The cost of labour and materials associated with vessel installation can be substantially reduced if the most convenient style has been selected. Complex pipework arrangements are avoided and result in an economical solution to your needs.


**WE OFFER A STANDARD CHOICE OF 8 STYLES AND OTHER ORIENTATIONS ARE AVAILABLE ON SPECIAL REQUEST.**

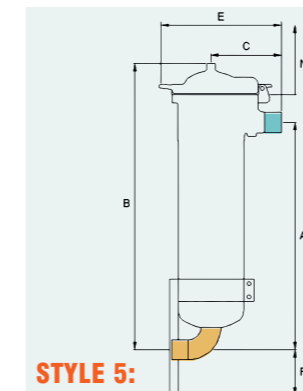


**STYLE 5:**  
Side inlet - 90° bottom elbow  
outlet on opposite side to inlet.

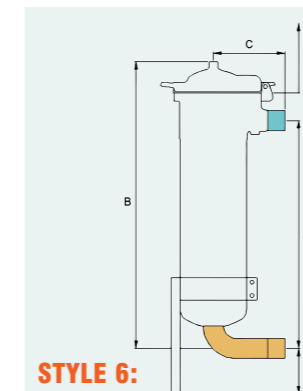

**STYLE 6:**  
Side inlet - 90° bottom elbow  
outlet on same side as inlet.

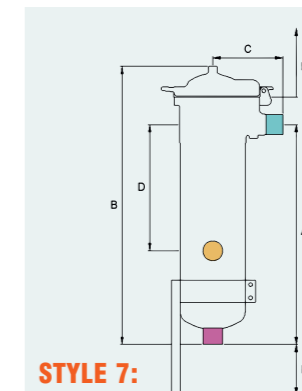

**STYLE 7:**  
Side inlet - side outlet  
90° clockwise from inlet -  
bottom drain.

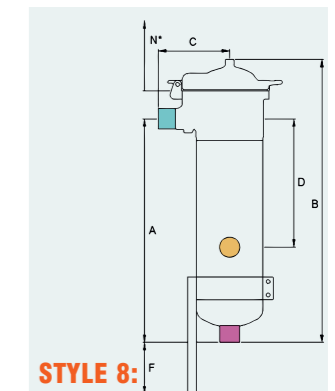

**STYLE 8:**  
Side inlet - side outlet  
90° anti-clockwise from inlet -  
bottom drain.

| MODEL  | CONNECTION TYPE | STYLE | A   | B    | C   | D   | E   | F       | N*  |
|--------|-----------------|-------|-----|------|-----|-----|-----|---------|-----|
| RBFD12 | 2"BSP (F)       | 2     | 876 | 1088 | 143 |     |     | 0-280   | 710 |
| RBFD12 | 2"BSP (F)       | 3     | 976 | 1188 | 143 | 795 | 286 | 0-190   | 710 |
| RBFD12 | 2"BSP (F)       | 4,7,8 | 976 | 1188 | 143 | 795 |     | 0-190   | 710 |
| RBFD12 | 2"BSP (F)       | 5     | 897 | 1109 | 143 |     | 286 | 60-260  | 710 |
| RBFD12 | 2"BSP (F)       | 6     | 897 | 1109 | 143 |     |     | 60-260  | 710 |
| RBFD12 | 2"Flanged       | 2     | 886 | 1098 | 176 |     |     | 0-270   | 710 |
| RBFD12 | 2"Flanged       | 3     | 976 | 1188 | 176 | 795 | 352 | 0-190   | 710 |
| RBFD12 | 2"Flanged       | 4,7,8 | 976 | 1188 | 176 | 795 |     | 0-190   | 710 |
| RBFD12 | 2"Flanged       | 5     | 897 | 1109 | 176 |     | 352 | 90-260  | 710 |
| RBFD12 | 2"Flanged       | 6     | 897 | 1109 | 176 |     |     | 90-260  | 710 |
| HD13   | 1" BSP (F)      | 1     | 199 | 326  | 138 |     | 240 |         | 180 |
| HD13   | 1" BSP (F)      | 2     | 199 | 326  | 138 |     |     |         | 180 |
| HD13   | 1" Flanged      | 1     | 199 | 326  | 160 |     | 280 |         | 180 |
| HD13   | 1" Flanged      | 2     | 204 | 331  | 160 |     |     |         | 180 |
| HD14   | 1" BSP (F)      | 1     | 334 | 461  | 138 |     | 240 |         | 320 |
| HD14   | 1" BSP (F)      | 2     | 334 | 461  | 138 |     |     |         | 320 |
| HD14   | 1" Flanged      | 1     | 334 | 461  | 160 |     | 280 |         | 320 |
| HD14   | 1" Flanged      | 2     | 339 | 466  | 160 |     |     |         | 320 |
| HD11   | 2"BSP (F)       | 1     | 366 | 559  | 236 |     | 390 | 190-250 | 340 |
| HD11   | 2"BSP (F)       | 2     | 366 | 559  | 236 |     |     | 190-250 | 340 |
| HD11   | 2"BSP (F)       | 5     | 387 | 580  | 236 |     | 368 | 170-230 | 340 |
| HD11   | 2"BSP (F)       | 6     | 387 | 580  | 236 |     |     | 170-230 | 340 |
| HD11   | 2"Flanged       | 1     | 366 | 559  | 257 |     | 427 | 190-250 | 340 |
| HD11   | 2"Flanged       | 2     | 373 | 566  | 257 |     |     | 185-245 | 340 |
| HD11   | 2"Flanged       | 5     | 387 | 580  | 257 |     | 427 | 170-230 | 340 |
| HD11   | 2"Flanged       | 6     | 387 | 580  | 257 |     |     | 170-230 | 340 |
| HD12   | 2"BSP (F)       | 1     | 740 | 933  | 236 |     | 390 | 0-155   | 710 |
| HD12   | 2"BSP (F)       | 2     | 740 | 933  | 236 |     |     | 0-250   | 710 |
| HD12   | 2"BSP (F)       | 3     | 740 | 933  | 236 | 525 | 390 | 0-155   | 710 |
| HD12   | 2"BSP (F)       | 4,7,8 | 740 | 933  | 236 | 525 |     | 0-155   | 710 |
| HD12   | 2"BSP (F)       | 5     | 761 | 954  | 236 |     | 368 | 40-230  | 710 |
| HD12   | 2"BSP (F)       | 6     | 761 | 954  | 236 |     |     | 40-230  | 710 |
| HD12   | 2"Flanged       | 1     | 740 | 933  | 257 |     | 427 | 0-150   | 710 |
| HD12   | 2"Flanged       | 2     | 747 | 940  | 257 |     |     | 0-245   | 710 |
| HD12   | 2"Flanged       | 3     | 740 | 933  | 257 | 525 | 427 | 0-150   | 710 |
| HD12   | 2"Flanged       | 4,7,8 | 740 | 933  | 257 | 525 |     | 0-150   | 710 |
| HD12   | 2"Flanged       | 5     | 761 | 954  | 257 |     | 427 | 90-230  | 710 |
| HD12   | 2"Flanged       | 6     | 761 | 954  | 257 |     |     | 90-230  | 710 |

ALL DIMENSIONS (mm) ARE NOMINAL, NOT TO BE USED FOR INSTALLATION PURPOSES.

\*N = bag removal height.